


Remote Panel Pump Overview

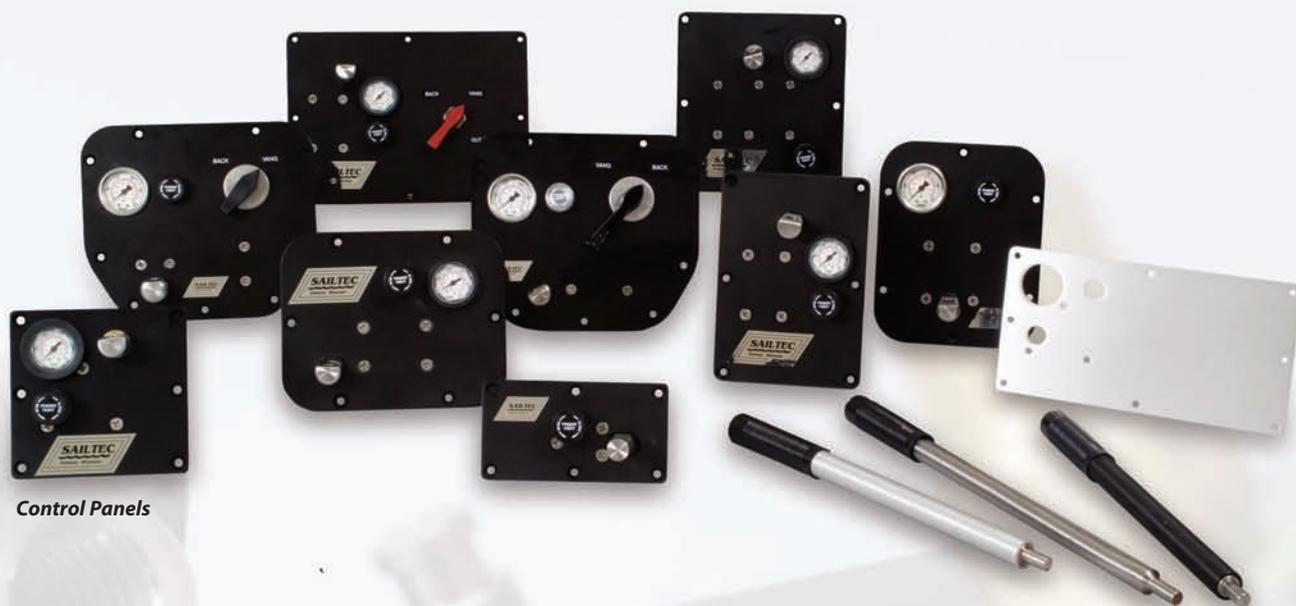

Control Panels

Pumps mounted on a panel and located in the cockpit, on the pedestal, near the rail(s), or on any bulkhead, can drive one or more cylinders located anywhere in the boat.

Generally, remote panel pumps result in less crew, more control, and faster cylinder action than integral pumps. They can be configured to push or pull rams for common applications such as backstays, vang, forestays, outhauls, and many “uncommon” custom applications, such as manual swim platform cylinders, canting keels, mast jacks, and others.

Selection can depend on class rules, size, depth, weight, speed of operation, cost, and appearance.

Sailtec produces a range of proven, durable, and reliable panel-mounted pumps that allow you to select a panel to balance the factors of size, speed, and cost with the needs of your boat. Other brands expect you to take their limited size, speed, and cost and find a place to install them. We believe the Sailtec panel selection is the broadest, smallest, fastest, most cost effective, and most durable in the industry. The high level of customer satisfaction, factory support, and nice appearance are bonuses.

MODEL	DESCRIPTION	PANEL DIMENSIONS		SPEED*		SPEED**	FEATURES / COMMENTS
		H X W X D INCH	H X W X D MM	IN ³	ML		
T7 Panel	Single Acting Pump	3.5 x 6.5 x 2.5	89 x 165 x 63	0.16	2.6	84	No gauge. Handle projects. 15" from panel face.
T6 Panel	Single Acting Pump	6.1 x 6.1 x 2.5	157 x 156 x 64	0.16	2.6	84	Gauge. Handle sweeps side to side. Very compact.
T5 Panel	Double Acting Pump	8.6 x 6.0 x 4.5	219 x 152 x 114	0.30	5.0	44	Gauge. Handle sweeps side to side. Currently the fastest panel in the industry.
T5HS Panel	Double Acting Pump	8.8 x 10.0 x 4.5	223 x 254 x 114	0.34	5.5	39	Larger 2" dia. gauge than T5. Attractive design. Fast acting. Handle location improved.
M Panel	Double Acting Pump	8.8 x 7.0 x 2.5	223 x 178 x 63	0.38	6.2	35	Large 2" dia. gauge. Shallow depth. Attractive. Fastest pump available to market.
TX6 Panel	Single Acting Pump	8.8 x 7.0 x 2.5	223 x 178 x 63	0.18	2.9	75	Large 2" dia. gauge. Shallow depth. Attractive.
	Two Speed Autoshift	8.8 x 11.0 x 5.0	222 x 279 x 127	0.75	12.2	19	Operates full capacity to 2000 psi and half capacity from 2000 to 5000 psi.

*Volume of oil per pump strokes. **Number of strokes to retract a -12 cylinder ram 10".

Data subject to change.

For more information call: 920-233-4242 or email: info@sailtec.com

