


Hydraulic Panel Pumps

MODEL T5 PANEL PUMP

For remote pumps to control cylinders such as backstays, vang, outhauls, forestays, etc., these double-acting pumps are ***still faster, still more economical, and still easier to install than competitive models.***

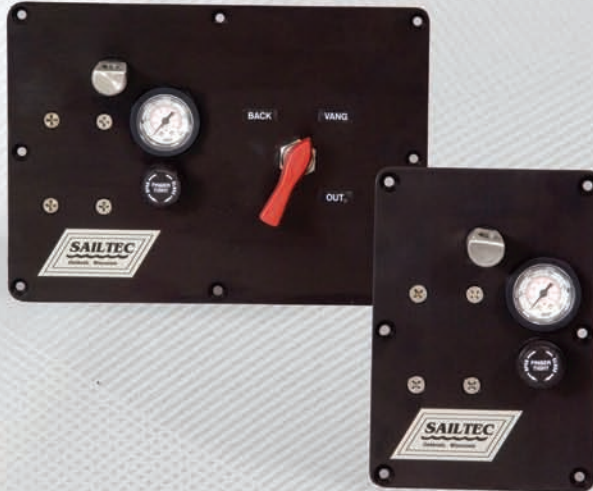

Features

- ♦ The most popular combination of performance and economy
- ♦ Double acting
- ♦ Very fast – up to 5.0 ml/stroke
- ♦ Small footprint
- ♦ Self-purging of air, and self-priming
- ♦ Proven durability
- ♦ Easy to install

Construction

- ♦ Aircraft-quality aluminum
- ♦ Filtered intake from reservoir
- ♦ Adjustable relief valve
- ♦ Nearly flush gauges
- ♦ Valves - zero leakage to 6000 psi

All panels come complete with handle, hardware, reservoir, and reservoir hose

DESCRIPTION	PANEL DIMENSIONS		DEPTH		WEIGHT		PART No.
	INCH	MM	IN	MM	LB	KG	
1 Function	8.6 x 6.0	218 x 152	4.3	109	5.5	2.45	T5-1
2 Function	8.6 x 12.0	218 x 305	4.3	109	6.1	2.70	T5-2
3 Function	8.6 x 12.0	218 x 305	4.3	109	7.4	3.29	T5-3
4 Function	8.6 x 12.0	218 x 305	4.3	109	7.4	3.29	T5-4

Data subject to change.

Proven for rugged, durable, trouble-free operation, the Sailtec T5 Model has been time tested with installations worldwide. The T5 Model outperforms competing systems handily.

Measure the difference for yourself.

Cylinder Rams	To Retract 10" (254mm)	
	Pump Strokes Needed	Seconds Needed (When pumping two strokes per second)
-10	31	16
-12	44	22
-17	65	33
-22	84	42

